

# ValidDumps



### Try Before You Buy

Download a free sample of any of our exam questions and answers


- ✓ 24/7 customer support, Secure shopping site
- ✓ Free One year updates to match real exam scenarios
- ✓ If you failed your exam after buying our products we will refund the full amount back to you.

Select a vendor...

Select an exam...

Your email address


[Free Download](#)



### What Clients Say About Us

- “The exam is actually not scared. It is quite similar with the on-line test. I feel casual to pass it. The questions are not hard. - Edward
- “Do not treat yourself too hard. Only 2 days to pass the exam by this dumps. you have much time to relax. really good dumps. - Berger
- “I am happy to choose validdumps, it is very useful for my exam. It is worthy it. - Henry

  
HAPPY CUSTOMERS  
51892

  
DOWNLOADS  
68912

  
TEAM MEMBERS  
56892

  
SHARES  
75162

<http://www.validdumps.top>

The valid and reliable exam dumps are the guarantee for your success

**Exam** : **642-883**

**Title** : Deploying Cisco Service  
Provider Network Routing  
(SPROUTE)

**Vendor** : Cisco

**Version** : DEMO

**NO.1** Which two statements regarding OSPFv2 or OSPFv3 authentication are correct? (Choose two.)

- A. OSPFv2 supports MD5 authentication.
- B. OSPFv2 supports MD5 or SHA authentication.
- C. OSPFv2 relies on the native security stack that uses IPsec.
- D. OSPFv3 supports MD5 authentication.
- E. OSPFv3 supports MD5 or SHA authentication.
- F. OSPFv3 relies on the native security stack that uses IPsec.

**Answer:** A,F

**NO.2** Which two mandatory tasks must an IS-IS NSF-capable router perform for RP switchover? (Choose two.)

- A. Relearn the available IS-IS neighbors.
- B. Reacquire the contents of the LSD.
- C. Reset peering with the available IS-IS neighbors.
- D. Keep the existing contents of the LSD.
- E. Rediscover DIS for each link segment.

**Answer:** A,B

**NO.3** Refer to the exhibit.

```
route-policy OSPFintoISIS
  if tag eq xxx then
    drop
  else
    set tag yyy
  endif
end-policy
```

Based on the Cisco IOS XR route policy configuration, when redistributing OSPF routes into IS-IS, to which of the following does the "tag" value correspond?

- A. The tag value represents the OSPF metric.
- B. The tag value represents the IS-IS metric.
- C. The tag value identifies a route or set of routes.
- D. The tag value is used to match whether the IS-IS route is an external or internal IS-IS route.
- E. The tag value represents the administrative distance.

**Answer:** C

**NO.4** Which two statements about a transit AS are correct? (Choose two.)

- A. A transit AS has eBGP connection(s) to only one external AS.
- B. Routes between ASs are always exchanged via eBGP.
- C. A transit AS uses an IGP like OSPF or ISIS to propagate the external networks within the transit AS.
- D. Core routers within a transit AS normally use default routing to reach the external networks.
- E. iBGP sessions can be established between non directly connected routers.

**Answer:** B,E

**NO.5** Which statement best describes the function of a BGP af-group?

- A. Use templates in different neighbors so it makes the BGP implementation easier.
- B. Group different address family neighbors inside BGP.
- C. Create a group of neighbors that can inherit address family configuration inside BGP.
- D. Substitute the class maps inside BGP on Cisco IOS XR devices.


**Answer:** B

**NO.6** Which three statements are true regarding the OSPF router ID? (Choose three.)

- A. The OSPF routing process chooses a router ID for itself when it starts up.
- B. The router-id command is the preferred procedure to set the router ID.
- C. If a loopback interface is configured, its address will always be preferred as the router ID over any other methods.
- D. After the router ID is set, it does not change, even if the interface that the router is using for the router ID goes down. The router ID changes only if the router reloads or if the OSPF routing process restarts.
- E. In OSPF version 3, the OSPF router ID uses a 128-bit number.

**Answer:** A,B,D

**NO.7** Refer to the exhibit.

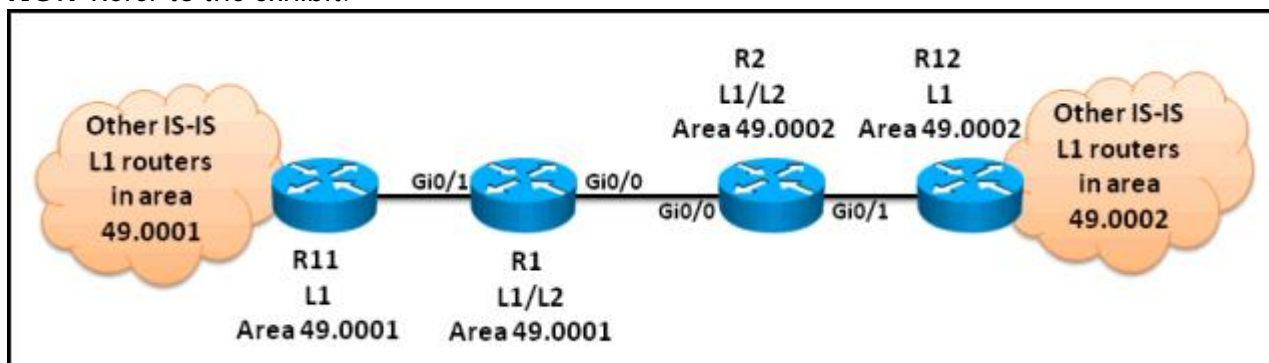


Which two configuration options can be used to optimize the IS-IS network scenario? (Choose two.)

- A. Change the R1 and R2 IS type to Level 2.
- B. Change the R1 and R2 IS type to Level 1.
- C. Change the gi0/0 interface IS-IS circuit type on R1 and R2 to Level 2 only.
- D. Change the gi0/1 interface IS-IS circuit type on R1 and R2 to Level 1.
- E. Change the IS type for all the routers to Level-1-2.
- F. Change the IS-IS network type for all the routers to point-to-point.

**Answer:** C,D

**NO.8** Refer to the exhibit.

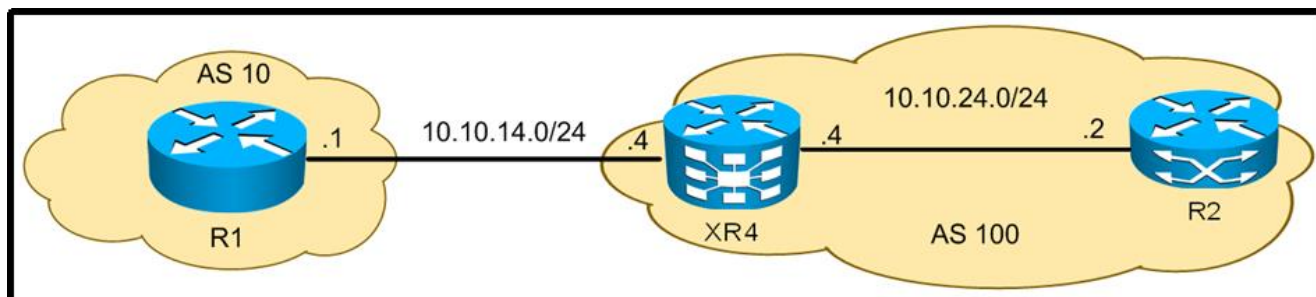

Which configuration is correct for XR4 for an e-BGP session with R1?

- A.** router bgp 100  
neighbor 10.10.14.1  
remote-as 100
- B.** router bgp 100  
neighbor 10.10.14.1  
remote-as 10  
address-family ipv4 unicast
- C.** router bgp 100  
address-family ipv4 unicast  
neighbor 10.10.14.1  
remote-as 100  
address-family ipv4 unicast
- D.** router bgp 100  
address-family ipv4 unicast  
neighbor 10.10.14.1  
remote-as 100


**Answer:** C

**NO.9** Which configuration implements the most secured OSPF authentication mode on Cisco IOS XE?

- A.** interface Gi0/0/0/0  
ip ospf authentication message-digest  
ip ospf message-digest-key 1 md5 cisco
- B.** router ospf 1  
area 1  
authentication message-digest  
interface GigabitEthernet0/0/0/0  
message-digest-key 1 md5 cisco
- C.** router ospf 1  
area 1  
interface GigabitEthernet0/0/0/0  
authentication message-digest  
message-digest-key 1 md5 cisco
- D.** router ospf 1  
area 1 authentication  
interface GigabitEthernet0/0/0/0  
ip ospf authentication-key cisco
- E.** interface Gi0/0/0/0  
ip ospf authentication  
ip ospf authentication-key cisco

**Answer:** A

**NO.10** Refer to the exhibit.

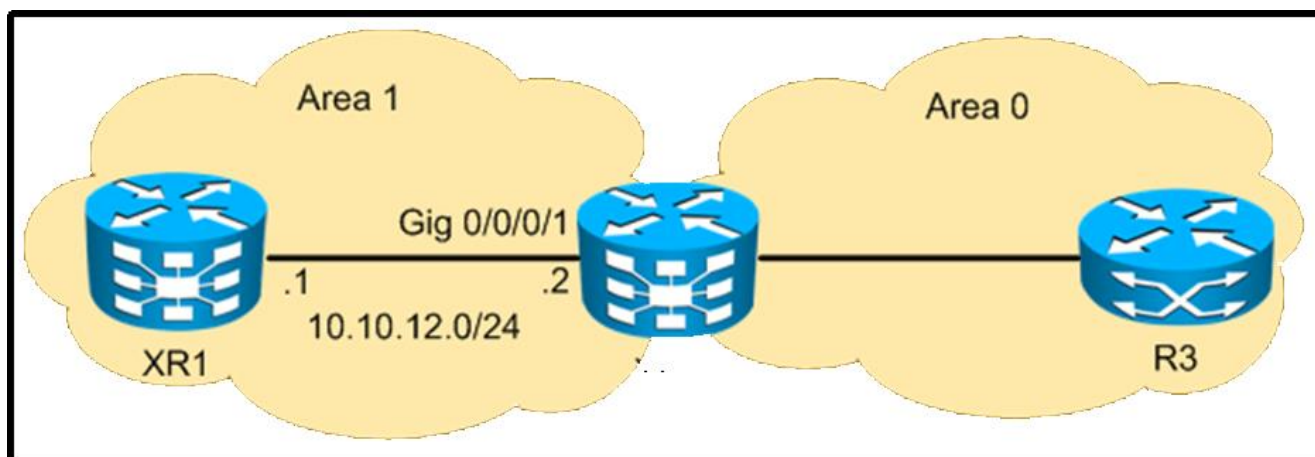

Area 1 routers must have only a default route in their OSPF routing tables. Which configuration must be completed on XR2 to meet this requirement?

- A.** router ospf 1  
address-family ipv4  
interface GigabitEthernet0/0/0/1  
area 1 stub no-summary
- B.** router ospf 1  
area 1 stub no-summary
- C.** router ospf 1  
area 1 stub  
interface GigabitEthernet0/0/0/1
- D.** router ospf 1  
area 1 stub no-summary  
interface GigabitEthernet0/0/0/1

**Answer:** D

**NO.11** A customer is concerned about rerouting attacks on the IS-IS domain spanning the company. Which keychain management configuration is valid to authenticate IS-IS link-state information and provide a first response to this type of attack for Cisco IOS XR instances?

- A.** configurekey chain isis-keyskey 1key-string myP@ssw0rdcryptographic-algorithm MD5send-lifetime 18:05:00 may 31 2014 infiniteaccept-lifetime 18:05:00 may 31 2014 infiniterouter isis 1isp-password keychain isis-keys
- B.** key chain cisco-xrkey 10key-string myP@ssw0rd!interface GigabitEthernet 3/1/1ip addressip\_address subnet\_maskip router isisis authentication mode md5 level-1isis authentication key-chain cisco-xr level-1
- C.** configurekey chain isis-keys!key 8cryptographic- algorithm MD5send-lifetime 18:05:00 may 31 2014 infiniteaccept-lifetime 18:05:00 may 31 2014 infiniterouter isis 1isp-password keychainisis-keys
- D.** configurekey chain isis-keyskey-string myP@ssw0rdsend-lifetime 18:05:00 may 31 2014 infiniteaccept-lifetime 18:05:00 may 31 2014 infiniterouter isis 1isp-password keychain isis-keys

**Answer:** A

**NO.12** A static default route has been inserted into the configuration of a Cisco IOS XE router. Which option advertises the route into the OSPF domain?

- A.** router ospf 1 network 0.0.0.0 area 0 redistribute static subnets

- B. router ospf 1 redistribute static
- C. router ospf 1 redistribute static subnets
- D. router ospf 1 default-information originate

**Answer:** D

**NO.13** An engineer is working for a service provider who is strategically important to the Internet data traffic.

The CTO is promoting a core infrastructure upgrade to connect via optical links network service providers.

Which three concerns must be addressed while planning the new BGP features and functionalities? (Choose three.)

- A. BGP suboptimal routing
- B. IPv4 exhaustion
- C. routers and switches hardware capabilities
- D. route dampening of current customers
- E. multihoming policies of new customers
- F. IGP reconvergence time on the inter-AS links
- G. BGP blackholing when acting as transit autonomous system

**Answer:** A,C,G

**NO.14** Refer to the exhibit.

Network	Next Hop	Path
*> 1.1.1.1/32	10.10.12.1	100 i
*> 2.2.2.2/32	0.0.0.0	i
*> 3.3.3.3/32	10.10.12.1	100 300 i
*> 4.4.4.4/32	10.10.12.1	100 300 400 i

R2 wants to filter out only routes originated from AS 300. Which AS path access list should be used?

- A. ip as-path access-list 1 deny\_300\$
- B. ip as-path access-list 1 deny^300\_
- C. ip as-path access-list 1 deny ^300\$
- D. ip as-path access-list 1 deny\_300\_

**Answer:** C

**NO.15** Routes that are received from an IBGP peer will be propagated to which other routers by default?

- A. to the EBGp peers only
- B. to the IBGP peers only
- C. to both EBGp and IBGP peers
- D. to no other peers

**Answer:** A